

Multi Purpose Belt Type Optical Sorter



CSV600BI / CSV600BM




SATAKE CORPORATION

**Specifications** 

Model		CSV600BI	CSV600BM
NIR Sorting			0
Capacity *1		0.1~6.0 (Soybean) t/h	
Subject Material *2		Beans, Tree Nuts, Seeds, Food (Snacks, etc.), Industrial Material (Recycle Plastic, etc.)	
Raw Material Supply		Removable Electromagnetic Feeder	
Belt	Material	Polyurethane (Meets Japanese Food Sanitation Law)	
	Effective Size	Width:650 mm, Length:1,680 mm	
Optics	Camera	Full Color CCD x 4	Full Color CCD × 4, NIR Camera × 2
	Lighting	White LED × 6	White LED × 6, NIR LED × 4
Ejector Valve		QTY 136 5mm Pitch	
Cleaning Device		Wiper, Sweeper	
Power Requirement		2.0kW Max.(AC200~220V Single Phase)	
Air Consumption		1,000~1,500Nℓ/min	
Required Air for Optional Dust Collection *3		10m <sup>3</sup> /min	
Net Weight		Approx. 800 kg	
Optional Parts		(1)Flow Straightener , (2)Reject chute with dust collector connection (3)Heater, (4)Blower, (5)Buffer Sheet for Accept chute	

- \*1 Sorting performance varies depending on variety and contamination of material.
- \*2 May not be able to sort due to the characteristics of material.
- \*3 Dust collection system may be required depending on the material.

#### Dimensions (mm)

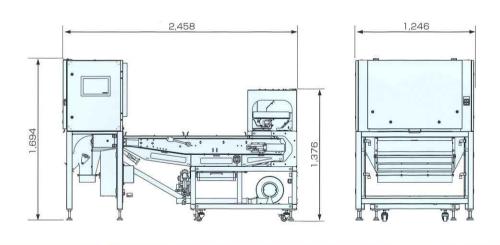

All Satake products are the subject of continuous development and, as a result, their specification may change and differ in detail from those shown.

SATAKE USA INC.

### SATAKE CORPORATION

Head Office 2-30 Saijo Nishihonmachi, Higashi-Hiroshima-shi, Hiroshima-ken, 739-8602, Japan URL: www.satake-group.com

SATAKE AUSTRALIA PTY. LTD.

SATAKE INDIA ENGINEERING PVT. LTD.
4th Floor, Tower-1, HB Twin Towers, A2, 3, 4, Netaji Subhash Place, Wazirpur District Centre, New Delhi, 110034, India URL: www.satakeindia.com/

SATAKE (THAILAND) CO., LTD.
133,134 Moo 5, Bangkadi, Mueang Pathum Thani, Pathum Thani 12000, Thailand URL: www.sataketh.com

Alpha mighty Dunsan Building, 13F, 229, Daedeck-daero, Seo-gu, 35229 URL: www.satake-group.com

Korea Branch

SATAKE ASIA CO., LTD. 888/84 Mahatun Plaza Bld., 8th Floor, Ploenchit Rd., Lumpini, Pathumwan, Bangkok, 10330, Thailand URL: www.sataketh.com

10900 Cash Road, Stafford, Texas, 77477, U.S.A. URL: www.satake-usa.com

SATAKE AMERICA LATINA LTDA. Rua Xavantes, 155-Pav. 20, Bairro Atiradores, CEP 89203-210, Joinville, Santa Catarina, Brazil URL: www.satake.com.br/

PT. SATAKE GOBEL INDONESIA Gedung Surabaya Bumi Mandiri, Lantai 9, Jalan Jenderal Basuki Rachmat Nomor 129-137, Unit 905 B,

SATAKE EUROPE LTD. P.O. Box 53, Horsfield Way, Bredbury Industrial Park, Bredbury, Stockport, Cheshire, SK6 2SU, U.K. URL: www.satake-europe.com

SATAKE MANUFACTURING (SUZHOU) CO., LTD. 229 Jin Feng Road, Suzhou New District, Suzhou, Jiangsu Province, 215129, China URL: www.satake.cn/

ISO 9001 Certification (Quality Management Systems)


SATAKE CORPORATION has obtained ISO9001 and ISO14001 certification. These international standards for management systems ensure Satake will continue to provide high quality products and services.

15 Leland Street, Penrith, N.S.W., 2750, Australia URL: www.satake.com.au No. 766-01

#### CSV600BI / CSV600BM



## Multi-Purpose Belt Sorter with NIR Sorting, Shape Recognition, Smart Sensitivity, and More...

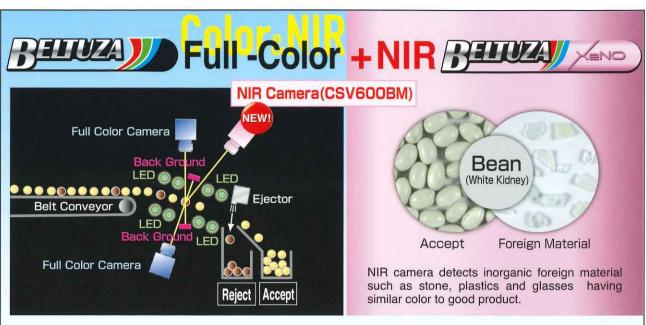


The belt stably and uniformly conveys the material, ensuring high sorting accuracy. The improved LED lightning captures the slightest color differences via sensors. Defective products are ejected from the product stream by air. Detachable components are made of stainless steel for higher hygiene standards.

# **Sorting Various Products**



# **Shape Recognition**

Abnormal shapes such as broken and connected product can be sorted by the "Shape Recognition" technology. Less damage to the product than mechanical separation resulting in higher yield.



Accept

# **Easy Sensitivity Setting**



Satake's original automatic sensitivity creation system allows the users to adjust the sort setting easily in every material.







Optimum sensitivity setting is automatically created.


## **Feature**

full color camera.

#### Usability

### **Easy Operating Touch Panel**






## Maintenance

#### **Easy Sanitation**



Screen can be operated with the The machine body is a dividable LED lightning is applied for optical easy to remove.

#### **Economical**




same actions as smart-phones. structure for easy cleaning and section. It's lifetime is ten times Excellent visual screen design maintenance. Belt conveyor is longer compared with our existing fluorescent lamps.

#### Components



smooths out the material flow, making high capacity delivery possible even for larger materials of irregular shape.





A stainless steel body frame and removable parts provide easy cleaning and sanitation. BELTUZA's vibratory feeder can be removed for flexible product line layout.